


# Polyurethane Lagging

PRODUCT  
FACT  
SHEET

The range of TS Global pulley lagging products protect and increase the life of your conveyor belt and pulleys by absorbing the wear between these interfacing components.

In addition, our design and construction improves resistance to slippage, corrosion and abrasion coupled with greater shedding capabilities.

Balancing cost effectiveness with long life functionality makes this the ideal choice for your application.

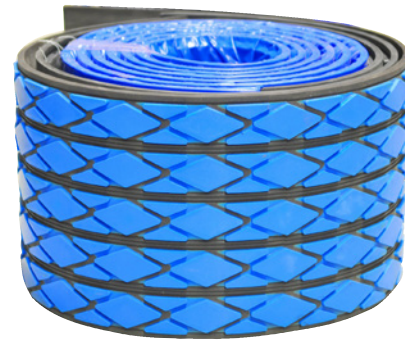

## Application

All non-drive pulleys.

-  Proven Performance
-  Quality Product
-  Flexibility in Design
-  On-time Delivery

| FEATURES                                                     | BENEFITS                                                                                                                                                                 |
|--------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Manufactured with CN bonding layer                           | = Delivers rubber tear bond to the shell which increases longevity                                                                                                       |
| Factory buffed back and edges                                | = Eliminates hazards associated with buffing<br>= Reduces installation time and cost                                                                                     |
| Manufactured with a diamond pattern                          | = Improves water shedding<br>= Minimises slippage                                                                                                                        |
| Lower DIN abrasion                                           | = Increases longevity of lagging (up to 4 times when compared to rubber lagging)<br>= Maximises re-lagging frequency<br>= Reduces the hazards associated with re-lagging |
| Can be installed in-situ without having to remove the pulley | = Eliminates hazards associated with removing pulley<br>= Reduces costs associated with removing pulley and crane hire                                                   |
| Lagging packed in plastic film                               | = Eliminates contamination of the buffed bonding layer                                                                                                                   |

# Polyurethane Lagging

PRODUCT  
FACT  
SHEET



| Item Code | Description                  | Unit  | Strip Length |         | Thickness |          | Weight |       |
|-----------|------------------------------|-------|--------------|---------|-----------|----------|--------|-------|
|           |                              |       | (m)          | (yards) | (mm)      | (inches) | (kg)   | (lbs) |
| 29-16-001 | Lagging Polyurethane Natural | Strip | 6.5          | 7 1/8   | 12        | 1/2      | 22     | 49    |

\*Custom sizes up to 4.0m available upon request.

DISTRIBUTED BY

## TSGlobal®

Leaders in Conveyor Products

PO Box 103, HRMC NSW 2300  
8 Laurio Place, Mayfield NSW 2304

**PHONE** +61 2 4968 8500

**EMAIL** sales@tsglobal.net.au

**WEB** www.tsglobal.net.au

ABN 30 603 644 748