

TuffPoly Skirt System

PRODUCT
FACT
SHEET


The range of TS Global polyurethane skirt systems ensures maximum retention of dust and product within the transfer chute reducing safety hazards and environmental impact around the conveyor.

This is achieved by ensuring that the structural steel of the transfer chute remains clear of the belt, reducing the possibility of belt damage through gouging, while the polyurethane skirt seals the transfer.

Balancing cost effectiveness with long life functionality makes this the ideal choice for your application.

Application

All conveyor loading areas.

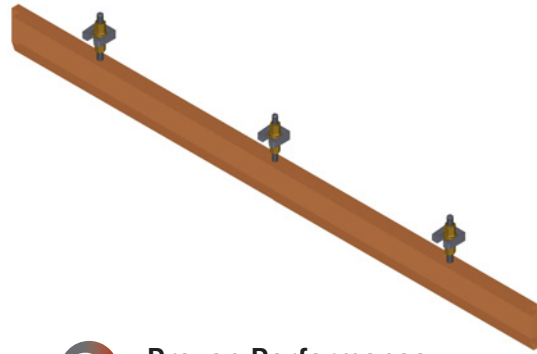

-  Proven Performance
-  Quality Product
-  Flexibility in Design
-  On-time Delivery

FEATURES	BENEFITS
Manufactured from high grade polyurethane	= Increases longevity
Manufactured in 1340mm modules	= Allows easier access into tight fitting areas = Reduces manual handling hazards
Mounting bolts manufactured from 304 stainless steel and adjusting nuts manufactured from brass	= Eliminates binding = Easy to adjust and maintain
Manufactured from robust polyurethane	= Improves sealing effectiveness = Improves product retention

*Available in natural and FRAS polyurethane.

TuffPoly Skirt System

PRODUCT
FACT
SHEET



Item Code	Description	Unit	Overall Length		Weight	
			(mm)	(inches)	(kg)	(lbs)
30-15-001	Skirting, Tuff polyurethane, Natural	Each	1340	52 ¾	6.45	14
30-15-002	Skirting, Tuff polyurethane, FRAS	Each	1340	52 ¾	6.45	14

DISTRIBUTED BY

TSGlobal®

Leaders in Conveyor Products

PO Box 103, HRMC NSW 2300
8 Laurio Place, Mayfield NSW 2304

PHONE +61 2 4968 8500

EMAIL sales@tsglobal.net.au

WEB www.tsglobal.net.au

ABN 30 603 644 748