

# Diagonal Plough


PRODUCT  
FACT  
SHEET

The range of TS Global ploughs is proven to protect and increase the life of your capital assets including pulleys and conveyor belt. This is achieved by removing displaced material on the return side of the conveyor belt prior to entering the pulley. It also improves tracking by reducing build-up on the pulley.

Balancing cost effectiveness with long life functionality makes this the ideal choice for your application.

## Application

Prior to drive, bend, take-up and tail pulleys on single direction conveyors only.

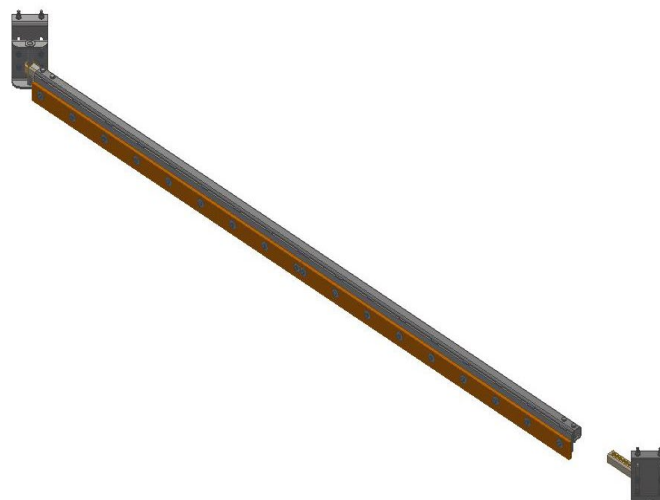

-  Proven Performance
-  Quality Product
-  Flexibility in Design
-  On-time Delivery

FEATURES	BENEFITS
Manufactured from high grade stainless steel	= Improves structural integrity and longevity
Flexible installation	= Displaced material can be removed to either left or right hand side. This enables safer access for cleaning = Can be adjusted to suit any stringer width
Heavy duty design	= Suitable for all applications
Blades are interchangeable with most brands	= Cost savings achieved without the need to replace the plough
Ability to supply blades with different wear characteristics to suit your specific applications	= Increases life expectancy of polyurethane blades = Optimises performance due to correct blade selection

\*Available with deflector for extreme conditions

# Diagonal Plough

PRODUCT  
FACT  
SHEET



Item Code Natural Blades	Item Code FRAS Blades	Description	Frame Length		Belt Width					Weight	
			(mm)	(inches)	(mm)	(inches)	to	(mm)	(inches)	(kg)	(lbs)
20-10-001	20-11-001	Plough Standard Duty Diagonal 0600 to 0750	1150	45 3/4	600	24	to	800	32	25	55
20-10-002	20-11-002	Plough Standard Duty Diagonal 0900 to 1050	1650	65	900	36	to	1050	42	30	66
20-12-001	20-13-001	Plough H/Duty Diagonal 0600 to 0750	1150	45 3/4	600	24	to	800	32	57	125
20-12-002	20-13-002	Plough H/Duty Diagonal 0900 to 1050	1650	65	900	36	to	1050	42	66	146
20-12-003	20-13-003	Plough H/Duty Diagonal 1200 to 1500	2150	84 3/4	1200	48	to	1500	60	76	168
20-12-004	20-13-004	Plough H/Duty Diagonal 1600 to 1800	2650	104 1/2	1600	64	to	1800	72	86	189

For more information, please contact TS Global directly and/or your TS Global product distributor.

DISTRIBUTED BY

**TS Global**  
Conveyor & Polyurethane Specialists

**WA OFFICE**  
Welshpool WA

**NSW OFFICE**  
Tomago NSW

**QLD OFFICE**  
Emerald QLD

ABN 30 603 644 748

**PHONE** 1300 418 298 • **EMAIL** sales@tsglobal.net.au • **WEB** www.tsglobal.net.au

PAGE 62