

# Pulley Lifting Beam


PRODUCT  
FACT  
SHEET

The TS Global pulley lifting beam has been designed to assist in the safe handling of conveyor pulleys. The pulley lifting beam comes in 4.5T, 7T, and 12T variants. Its multi-hole telescoping rail system can be adjusted to suit any face width between 882mm to 2441mm. The lifting beam allows you to balance the lift and remove the pulley in difficult situations in a safe and efficient manner.

Balancing cost effectiveness with long life functionality makes this the ideal choice for your application. TS Global's pulley lifting beam range is rated and certified to the Australian Standards AS3990 and AS4991.

## Application

Model	Typical Belt Width (mm)	Face Width (mm)
Small 4.5 Tonne	800mm – 1200mm	882mm-1482mm
Medium 7 Tonne	1000mm – 1800mm	1150mm-1986mm
Large 12 Tonne	1400mm – 2300mm	1541mm-2441mm

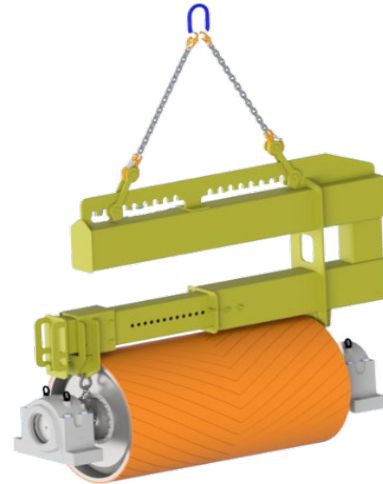

-  Proven Performance
-  Quality Product
-  Flexibility in Design
-  On-time Delivery

FEATURES	BENEFITS
Multi hole rail system with rapid adjustable dog bone	= Flexible in difficult situations increasing safety and efficiency
	= Allows the pulley lift to be balanced for safe removal
	= Can be adjusted to suit a range of pulley faces
Available in a range of load ratings	= Ensures the correct unit is used for the lift
Compact design	= Fits into tight applications
C shape design	= Allows pulley to be removed without the removal of belt
	= Assists in getting lifting point directly over the centre of the pulley
Secondary safety chains	= Provides a secondary safety device to reduce risks

# Pulley Lifting Beam

PRODUCT  
FACT  
SHEET



Item Code	Description	Unit	Belt Width					Face Width					WLL (t)	Weight	
			(mm)	(inches)	to	(mm)	(inches)	(mm)	(inches)	to	(mm)	(inches)		(kg)	(lbs)
34-10-001	4.5 Tonne Pulley Lifting Beam	Each	800	31½	to	1200	47¼	882	34¾	to	1482	58⅜	4.5	190	419
34-10-002	7 Tonne Pulley Lifting Beam	Each	1000	39⅝	to	1800	70⅞	1150	45¼	to	1986	78⅜	7	300	661
34-10-003	12 Tonne Pulley Lifting Beam	Each	1400	55⅝	to	2300	90⅞	1541	60⅜	to	2441	96⅝	12	770	1698

For more information, please contact TS Global directly and/or your TS Global product distributor.

DISTRIBUTED BY

**TS Global**  
Conveyor & Polyurethane Specialists

**WA OFFICE**  
Welshpool WA

**NSW OFFICE**  
Tomago NSW

**QLD OFFICE**  
Emerald QLD

ABN 30 603 644 748